


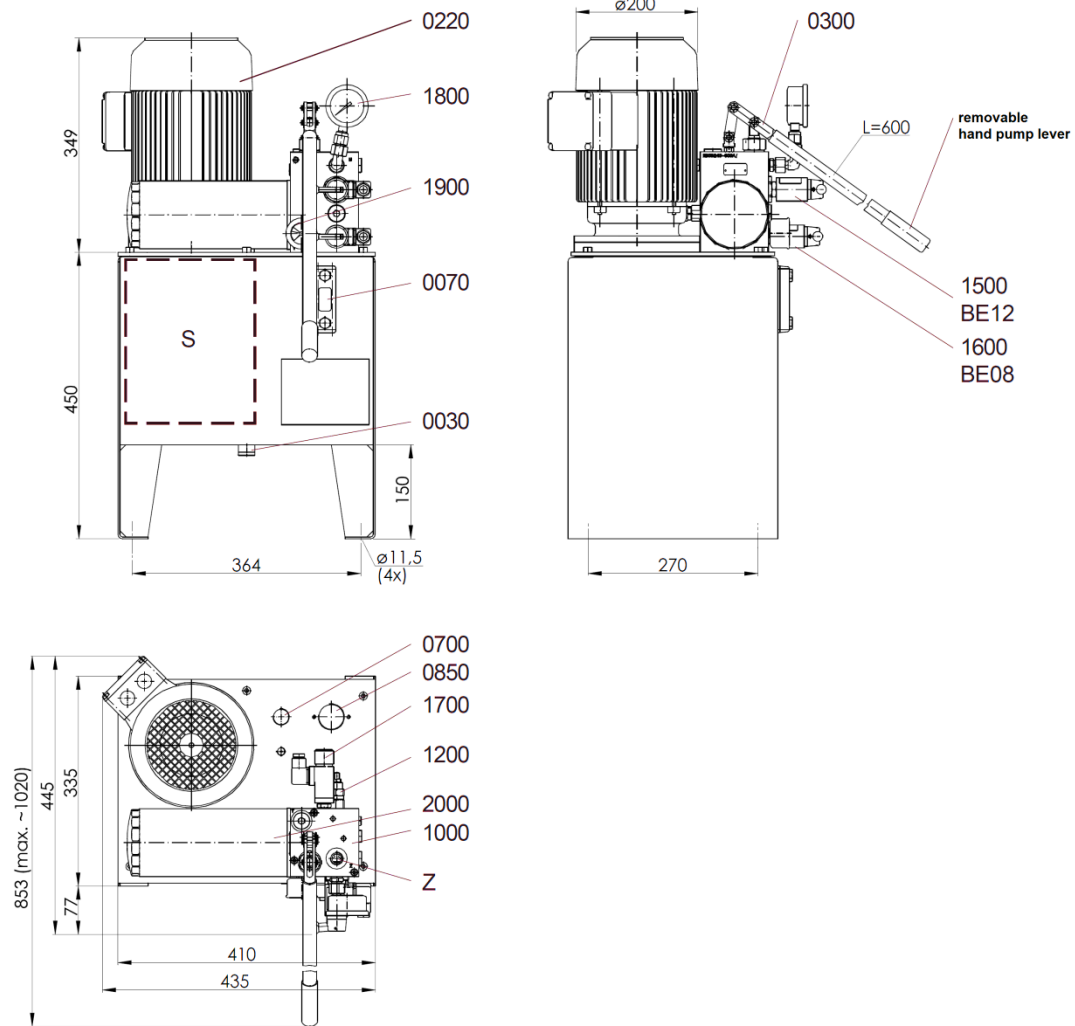

Technical Data

- | | |
|---|--|
| • Weight without oil-filling | approx.. 60 kg |
| • Tank volume | 4 ltr. |
| • Ambient temperature ranges | -15°C ... +50°C in standard version
-40°C ... +40°C in low temperature version
-15°C ... +75°C in high temperature version |
| • humidity | ≤ 90% |
| • recommended operating fluid | HLP Hydraulic oil acc DIN51524-T2
- for standard version: HLP Synth 32
- others version: upon request |
| • protection class | IP55 |
| • max. no. of operating cycles per hour | 50 |
| • motor | rotating clockwise when looking at ventilator: |
| supply voltage range | 50 Hz / 380-420 V
60 Hz / 440-480 V |
| • valve voltages | P = 24 V DC (Standard)
V = 115 V AC ; 50/60 Hz (optional)
W = 230 V AC ; 50/60 Hz (optional)
(others upon request) |
| • valve capacity per valve BE12 | 100 l/min at Δp 10 bar |
| valve capacity per redundant valve BE08 | 35 l/min at Δp 10 bar |
| • mounting position of HPU | horizontal |

Alterations reserved

SIBRE Siegerland-Bremsen GmbH – Auf der Stöcke 1-5 – D-35708 Haiger, Germany
Tel.: +49 2773 94000 – Fax: +49 2773 9400-10 – e-mail: info@sibre.de – www.sibre.de